


Type 495

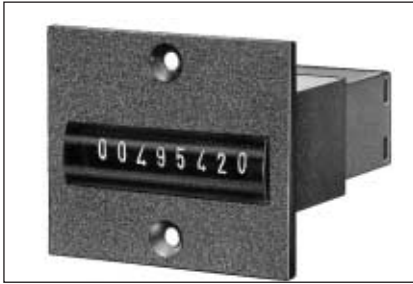


TECHNICAL DATA

Pneumatic Totalizing Counter

- 6 or 8-digit display
- Manual/pneumatic reset or without reset
- Simple installation
- Screw connection hose coupler or rapid-fit connector
- Maintenance-free operation

Display	6 or 8-digit, depending on version
Digit height	4 mm
Service pressure	2 ... 8 bar
Air quality	non-oily
Filter pore width	< 40 µm
Operating temperature	- 15 ... + 60 °C
Storage temperature	- 40 ... + 60 °C
Connection	hose coupler M5 or rapid-fit connector, depending on version
Mounting position	any
Vibro-stability	50 m/s ² acc. to IEC 068 2-6
Shock stability	400 m/s ² acc. to IEC 068 2-27
Maintenance-free operation	counting 30 x 10 ⁶ pulses, reset 1.5 x 10 ⁶ pulses
Weight	approx. 60 g
Count input	adding
Pulse length min..	8 ms
Counting frequency max.	25 Hz
Pulse duty factor	see glossary "counting frequency"
Reset	depending on version 6-digit counter - manual with button - pneumatic, min. pulse length 180 ms ATTENTION: minimum time period between last count pulse and pneumatic reset is 50 ms 8-digit counter - without reset

DIMENSIONED DRAWINGS

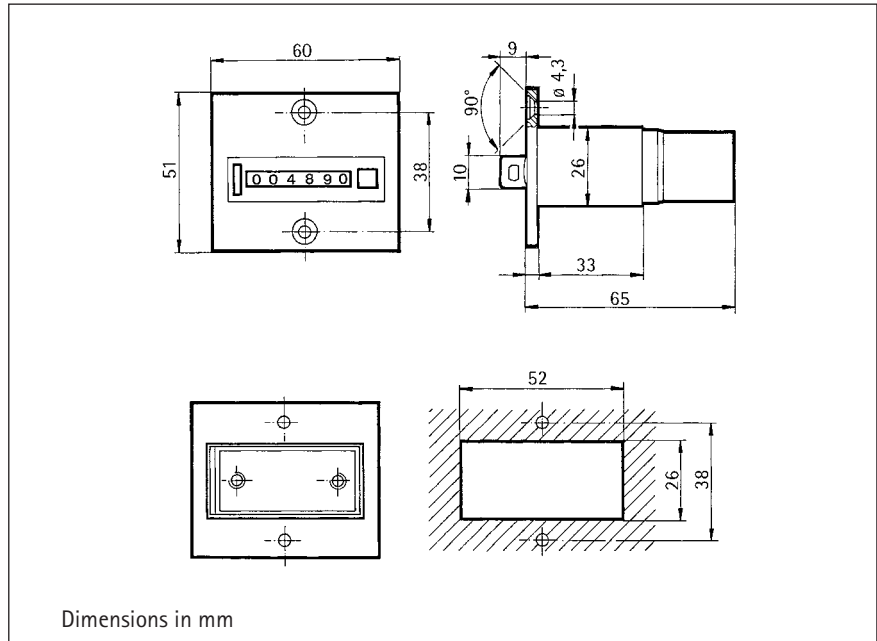

Dimensions in mm

ORDER INFORMATION

Counter

Accessories

Connection	6-digit	8-digit
Hose coupler M5	0 495 464	-
Rapid-fit connector	0 495 465	0 495 422
Protective cover IP 55	with knob	1 405 611
	with lock	1 405 612
Fittings for hose M5 x 1	3 641 733	
Connection kit M5/R 1/8"	1 495 089*	

* on request